


DIM 2000

INDUSTRIAL HIGH QUALITY DIMMER SWITCH

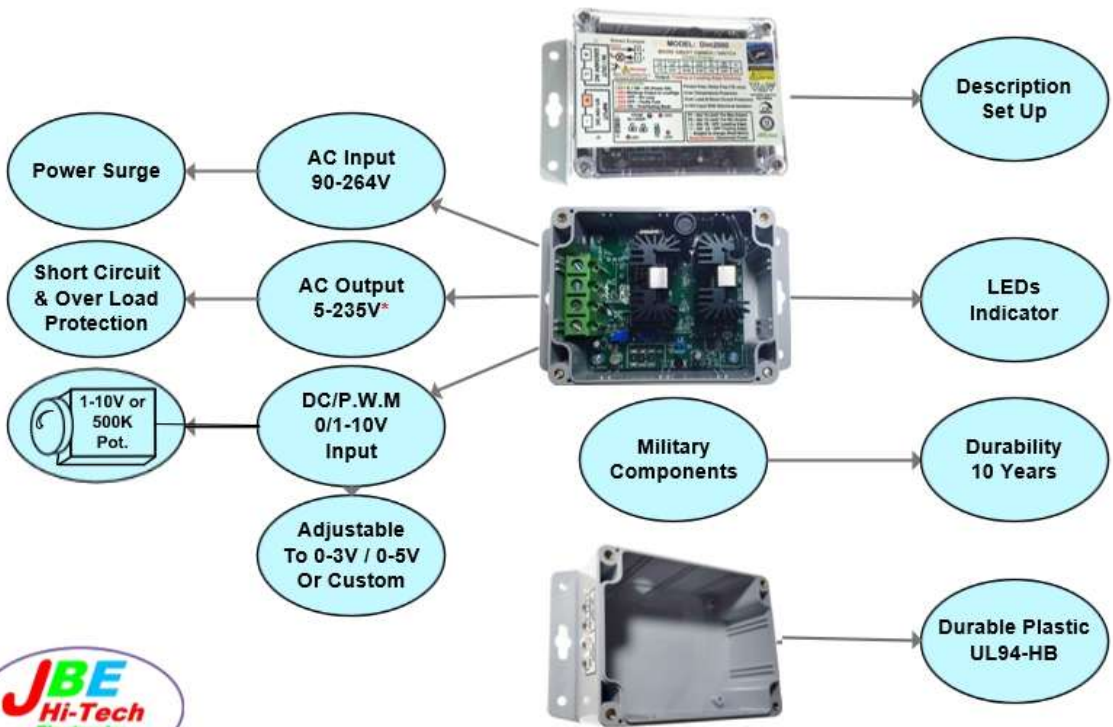

DIM2000 Series

Installation and consumer instructions for 0/1-10V DC, AC Dimmer Switch.

The Dim-series dimmer provides smooth dimming /control of incandescent & LED dimmable lamps, from full brightness down to soft candle glow or close to zero if needed. The Dim 2000 series is configured by default and no adjustment is recommended, but if you still need it due to a flickering of the lights, please contact JBE Hitech for assistance if you cannot resolve an issue. **/ Just remember that working on live electrical equipment is dangerous /** {the low-profile **P1 & P2** can be adjusted by *small screwdriver flat with electrical safety hand* to set the desired level of illumination. Via **P1** you can adjust maximum output voltage or maximum brightness. Via **P2** you can setup minimum output (standby mode). **P1** is set for 0-10V by default and **1-10V on request**. If require different voltage like 0-5V “**LO**” jumper is ON and 0-20V is OFF}. The new electronic design of the Dim2000 eliminates dimmer buzzing and humming even at minimum light settings.

TECHNICAL PARAMETERS:

| | |
|-------------------------------|---|
| Number of outputs | 1 |
| Nominal Mains Supply Voltage | 220–240V AC |
| AC voltage range | 190-264V AC |
| Mains Frequency Range(s) | 47–53 Hz |
| Electrical Isolation | 0-10V (Version) This input has optical isolation and is insulated from mains |
| Control Dimmer | 0-10V (0-5V or 0-20V) DC, 12V P.W.M, 1-10V POT. or 500K potentiometer |
| Load Brightness Control Range | 0% to 100% (0-97%* for typical Quality LEDs load)* |
| Minimum Load | 10-25W* (TE) & 5W (LE) |
| Load Rating | 7.6A max at 230-240V AC |
| Mains Terminals | 2/3 x 4-6 mm ² screw terminals |
| 0/1-10V Terminals | 2 x 4-6 mm ² screw terminals |
| Weight | ~450g |
| Operating Temp. Range: | 0–50°C |
| | 40 °C to +50 °C for output current ≤6.3A max |
| | 0 °C to +40 °C for output current >7.6A max |
| Max. casing temperature Tc | 80 °C |
| Operating Humidity Range | 10% - 90% RH non condensing |
| Thermal Protection | NTC temperature limit is set to: |
| Normal | 125 °C |
| Heavy Duty Model | 130 °C |
| Housing Material type | Polycarbonate (UL94-HB) |
| IP Rating | IP60 |
| Dim Device Type | LE- Leading Edge: TE- Trailing Edge |
| Safety Compliance | AS/NZS 3100:2017 + VDE Components certificate |
| Life Time | Up to 100000 h |
| Dimensions L x W x H (mm) | 90 x 115 x 55 |
| Note: | <p>1. All parameters measured at 230-240V AC input, rated current and 25°C ambient temperature.</p> <p>2. A driver is considered a component that will be operated in conjunction with final equipment such as LEDs Light (LED driver), if drivers are of poor quality it may interfere with proper operation.</p> <p>3. The light (load) connected to the dimmer must not exceed 7.6 A, the value read. For example, a 2KW load (manufacture tag information) will show only 1.7KW, so please don't increase the load. <i>The dimmer reduces the current / power to maintain green energy, otherwise the reading will be false and may damage the dimmer.</i></p> <p>4. * * “ <i>If an asterisk is next to the value or information, the value may be different.</i></p> |

SOFT START

The Dim2000 dimmer incorporates a soft start feature providing a noticeably smooth lamp illumination at turn on. This feature also minimise lamp filament start up stress, which may increase lamp life. (It's recommended by manufacture to start dimming from lower brightness to max).

THERMAL OVERLOAD COMPENSATION

The lamp brightness is automatically reduced in the event of high ambient temperatures or overload of the dimmer for a long time. It resets automatically when conditions are corrected.

THERMAL CUT-OUT x 2

Dim2000 includes two types of thermal fuses. The first is a non-resettable design that will burn out in the event of catastrophic circuit failure. The second is resettable and will automatically reduce the brightness to "0", if the dimmer is accidentally overloaded or overheated, it resets automatically when the overload conditions are corrected or the dimmer has cooled down.

SHORT CIRCUIT PROTECTION*

The Dim2000 series dimmer feature short circuit protection, design to ensure the dimmer can survive in case of wiring fault or catastrophic failure of the load. To resume to normal operation the dimmer needs to be **switch OFF** (disconnected from mains) and turn ON to resume operation.

Short circuit protection will not work if dimmer is set to 100% output (neutral version only)

FUSE CUT-OUT

The unit contain fast type fuse designed to blow or open in case of catastrophic circuit failure. This is a secondary protection measure intended to operate as a backup in case of persistent or prolonged overload conditions. If the fuse blow (fuse open), need to be replaced. Any significant overload should be avoided in order to prevent damage to the Dimmer.

DIM2000 AC Phase Cut Dimmer Controller

Features

- Ground Leakage Current for Flicker Reduction.
- User Programmable Leading or Trailing Edge Dimming Control
- Dynamic Over-Current and Temperature Protection
- Powered from the AC Line
- Symmetric AC Current Control
- Gate Pulse Width Programmable from 0 to 100% tON
- 8 Bit ADC Input for Dimming Control with an Adjustable Resistor or 0 to 10 V DC Voltage
- 226 Dimming Pulse Widths with 25 μ s Resolution and Built-in Ramp Up/Down Control for Smooth Dimming
- Automatically reduces the output voltage in the event of an increase in mains voltage like power surge.
- Military Components
- 600 μ A Quiescent Current
- Precision Temperature Compensated 2% Internal Timer
- Low Power Electronic Off State Mode
- 50 Hz and 60 Hz Options
- 0-10V DC Input with Optical Isolation Option

Applications

- Dimmer Switches
- Light's control
- AC Controls
- Heaters control system
- Safety Switch (On/Off)

Description /Operation

The DIM2000 is equipped with a 50Hz/60Hz IC controller for varying the pulse width for AC loads. The Dim2000 is for 50 Hz or 60Hz applications. The Dim2000 is powered from the AC line and generates a programmable gate drive for controlling the pulse width for external IGBT or MOSFET transistors. The pulse width can be user programmable with either an external resistor (potentiometer) or 0 to 10 V DC signal or controlled by a μP with a logic signal. The pulse width can be controlled from 0 to 100% duty cycle to provide a wide AC symmetric dimming control function when biased with a 3-wire application. For 2-wire Line- Hot and Load-Hot applications, the pulse width can typically be varied from 0 to a maximum gate pulse so that the load voltage is >98% of the AC line voltage. The 50/60Hz ver. will automatically override the pulse width control setting to allow maximum gate pulse width without flicker.









The Dim2000 takes advantage of the 2019 2nd edition code revision that allows for up to 0.5 mA of ground leakage current when a neutral wire is not available in the switch box. This improves the flicker performance for non-resistive loads.

The Dim2000 has user programmable over-current and temperature protection. With external or internal sense resistors, the maximum voltage drops across Q1 and Q2 can be set to limit the maximum current and transistor power dissipation.

The Dim2000 can be programmed for trailing edge dimming when the DIM Mode pin is low at start up (pulse width starts at the zero-crossing) or leading edge dimming when the DIM Mode pin is connected to the VDD pin at start up (pulse width ends at the zero crossing). When an OFF state is selected (DIM Control pin is 0 V).


The Dim2000 has an internal 8-bit ADC that allows for typically 226 selectable dimming pulse widths with a resolution of 25 μs per step. The 50/60 Hz controls the dim pulse width rate of change so that the minimum to maximum dim ramp time is approximately 1 second. This feature allows for a smooth dim transition. Internally, the Dim2000 contains a 17 V shunt regulator, 5 V linear regulator, 8Bit ADC, detection comparators, control logic and an IGBT or MOSFET gate driver.

COMPATIBLE LOAD TYPES:

| LoadSymbol | Load Type | Output Type LE/TE | Max. Load | Notes |
|---|---------------------------------|-------------------|--|---|
|  | Dimmable LED Lamps/Driver | TE | 1.8KW/ 2KW (1.8KW for Normal operation) | The LED driver must be dimmable. Maximum permitted number of drivers is 1800W divided by driver nameplate power rating. Due to variety of LED lamp designs, maximum number of LED lamps is further dependent on power-factor result when connected to dimmer. |
|  | Electronic Transformers | TE | 1800W | Dimmable Version |
|  | Standard Iron-Core Transformers | LE | 1600W | Due to variety of transformer designs, maximum LV lighting load is further dependent on transformer |
|  | Toroidal Iron-Core Transformers | LE | 1600W | |
|  | Incandescent | TE / LE | 1.8KW/2KW | 1.8KW for Normal Operation (7.6A max) |
|  | Dimmable CFLs | TE | 1800W | Due to variety of CFL designs, maximum number of CFL lamps is dependent on particular CFL |
|  | Dimmable LED Tubes | TE | 1800W | The LED Tubes must be dimmable |
|  | Ceiling Sweep Fans | LE | 1500W | Ceiling Sweep Fans, Exhaust Fans |


WIRING DIAGRAM:

“OPTO” VERSION

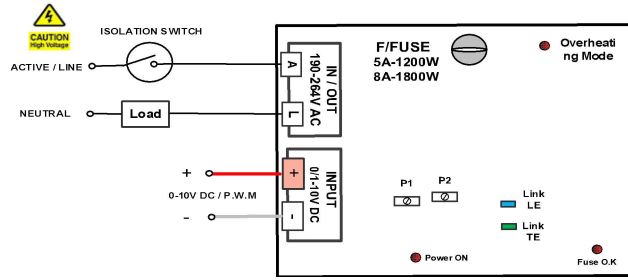


“1-10V” VERSION



1-10V rotary analogue dimmer

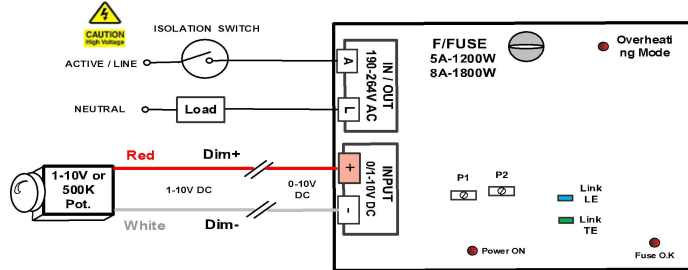

“N” VERSION WITH NEUTRAL

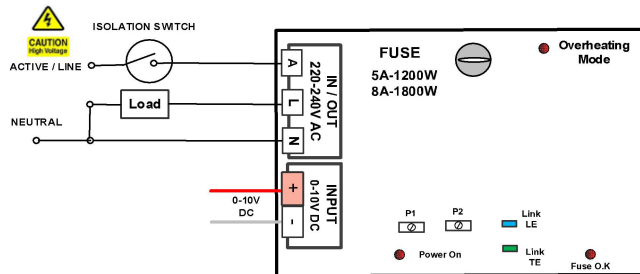

Load Power Derating vs. Ambient Temperature

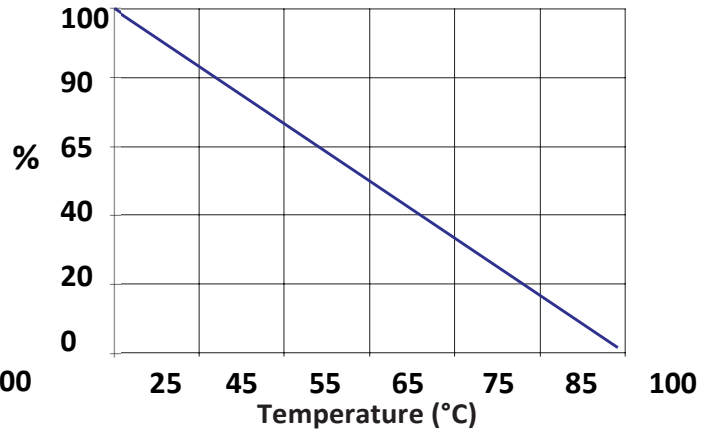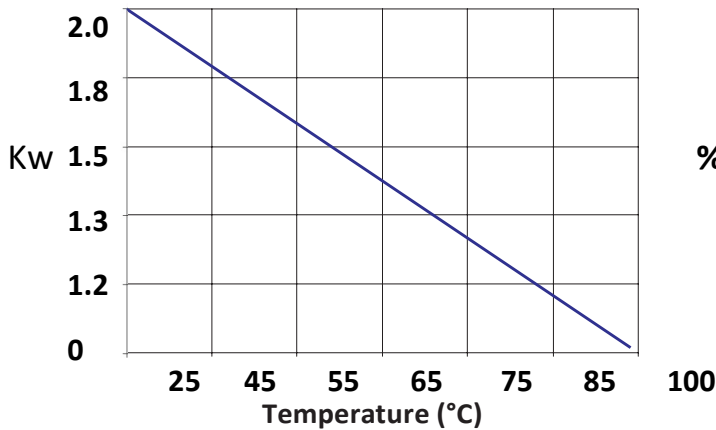

LEDs INDICATOR:

LEDs indicates the status working and faults

| Indicator | Description |
|----------------------|---|
| LED1 & LED2- ON | Mains ON (no Flicking Loop its O.K) |
| LED1 & LED2- ON | Flicking (output is too high or too low) P1 is for high level adjustment, P2 is for low level adjustment. If P2 is set too low P1 will not adjust maximum level (example; 240VAC input it is ≥ 230VAC output) |
| LED1- OFF, LED2- OFF | Mains OFF or no loop |
| LED1- ON, LED2- OFF | Faulty 8 A fuse / 10A Thermal fuse, no Load or 100% output (does not apply to the neutral version) |
| LED3- ON | No output, Overheating Mode (Reset automatically) |
| LED1- ON, LED2- ON | 60% of brightness, input 0-10V is “0” reading - Faulty Dimmer. Please contact JBE Hitech for replacement |

Warning 1

0/1-10 V source need to be with double or reinforced insulation with respect to AC mains. Suitable for passive and active control.

Warning 2

This dimmer will not operate with external filters to reduce flickering. (Contact JBE Hitech for advice).

Fault in the device operation

Dim2000 is designed for use in harsh environments where faults may occur, therefore, please read the "Installation Guide" and then check the status of the LEDs. If fuse is blown (LED2 is OFF), to replace the fuse, turn OFF the mains voltage to the dimmer (LED1 & LED2 is OFF) then unscrew the top cover of the dimmer, replace the fuse as described on the top sticky tag cover.

Safety Notice

Read and understand all safety information in this instruction. Improper installation of the product can result in electrical shock that can result in death or serious injury. If you are not qualified to install this equipment, **use a qualified electrical installer**. In this instruction, a WARNING box alerts you to a hazard that, if ignored, could result in death or serious personal injury. A Caution box describes a hazard that can cause minor personal injury. The attention triangle tells you about actions that can cause damage to the product or property. Improper installation of this product or use for any purpose other than described in this instruction, can result in product failure or damage to attached equipment. Pay attention to the specifications and wiring diagrams in this document.

Warranty

This product is guaranteed for a period of 24 to 120 months from the date of purchase against defects in workmanship and materials. Defects will be will be rectified by replacement of the product purchased except where, at our discretion, minor adjustments can be undertaken. The guarantee become invalid if in our opinion the product has been misused, abused, incorrectly installed, tampered with, connected to a power supply not corresponding with specifications, or subject to power surges. The guarantee does not include any labour or other associated expenses that may be involved in removal or installation of the product. To obtain a replacement under this guarantee, return the goods (prepaid) to the place of purchase or direct to the Australian Distributor. Proof of purchase must be supplied. This product does not contain any user serviceable parts. Spare parts and repair facilities are not available. This guarantee is in addition to and does not affect your rights under applicable law except where that law expressly provides otherwise.

Please contact Dimmerled Australia

JBE (Australia) Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this manual are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© 2020 JBE Hitech. All Rights Reserve

